

DD46 70 L - 2.5 cubic feet

DD46 Clear Glass Doors



DD46 Top Dry Section





**DD46** Available as Automatic, Semi-Automatic, and Upgradeable

**Product** 

**Door Type** 

**Dimensions** 

**Optional** 

23 Sensors, 17 Product Types Additional 25 liter refrigerated section for guest personal use Also available with big bottle balcony

Wood Door Glass Door: Clear, Opaque, or with your Logo

W: 20.47 in - 520 mm H: 22.44 in - 570 mm

D: 20.08 in - 510 mm with compressor

Integrated Top Dry Section **External Sections for Dry Products**  DD46 Opaque Doors





## **Technical**

# **Specifications**

### Standard DD46

Shelves with Sensors

6 bottles 6 cans

3 bottles (laid down) Adjustable shelves (No tools needed)

**Door Balconies** with Sensors

2 x 4 miniatures/

snacks

Big bottle available

Server OS

SQL 2012 R2 and Up

Software

Web-based

**Interface Types** 

TCP IP/RS 232

Available for all PMS

Data

Communication

Ethernet

ZigBee (wireless) Wi-Fi (wireless)

Database **Engine** 

Microsoft SQL Server 2012 and

Up

**Cooling Unit** 

Compressor **Absorption** 

Sensors


Infrared

Microswitches

Magnetic

Voltage 110-240 VAC /

50-60 HZ

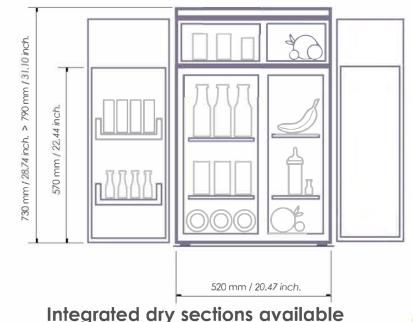

#### 38 inch<sup>2</sup> / 240 cm<sup>2</sup> clear area for airflow

The minibar must be properly ventilated. A channel for air circulation under the minibar, passing up and over the cooling unit and exhausting out from the minibar is mandatory. A 50 mm free space is recommended between the wall or cabinet back and cooling unit.















