bartec

# C32 40 L - 1.4 cubic feet

### C32 Brushed Aluminum Frame Clear Glass Door



C32 White Frame Glass Door



C32 No-Top Version



C32 Opaque Black Glass Door





Available as Automatic, Semi-Automatic and Upgradeable

## **Product**

**Door Type** 

**Dimensions** 

**Optional** 

32 Sensors, 24 Product Types Also Available with Big Bottle Balcony

Foam-Core Door Panel **Wood Door** 

Glass Door: Clear, Opaque, or Frosted with your Illuminated Logo

W: 15.75 in - 400 mm H: 22,44 in - 570 mm D: 19 in - 480 mm

**Integrated Dry Sections External Sections for Dry Products** 

# $\mathcal{O}$ rsolution miniba

# **Technical**

# **Specifications**

## Standard C32

Shelves with Sensors

8 bottles 8 cans

4 bottles (laid down) Adjustable shelves (No tools needed)

**Door Balconies** with Sensors

2 x 6 miniatures/

snacks

big bottle available

Server OS

2012 R2 and Up

Software

Web-based

Windows

Interface Types

TCP IP/RS 232

Available for all PMS

Data

Communication

Ethernet Twisted Pair ZigBee (wireless) Wi-Fi (wireless)

**Database** 

**Engine** 

Microsoft SQL Server 2012 and

Up

**Cooling Unit** 

Compressor

**Absorption** 

Sensors

Infrared


Microswitches

Magnetic

Voltage

110-240 VAC /

50-60 HZ

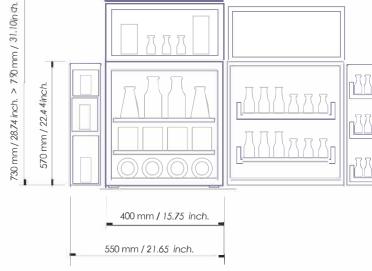

Integrated dry sections available

## 38 inch<sup>2</sup> / 240 cm<sup>2</sup> clear area for airflow

The minibar must be properly ventilated. A channel for air circulation under the minibar, passing up and over the cooling unit and exhausting out from the minibar is mandatory. A 50 mm free space is recommended between the wall or cabinet back and cooling unit.

